



LUX016

MONOCOMANDO LAVATÓRIO 2 FUROS BANCADA

EN 2 HOLE DECK-MOUNTED CONCEALED WASHBASIN MIXER LUX


FR MITIGEUR LAVABO ENCASTRÉE 2 TROUS DE PLAN LUX

ES MONOMANDO LAVABO EMPOTRAR DE PARED/ ENCIMERA LUX



A S M T A P S

WATER SOUL

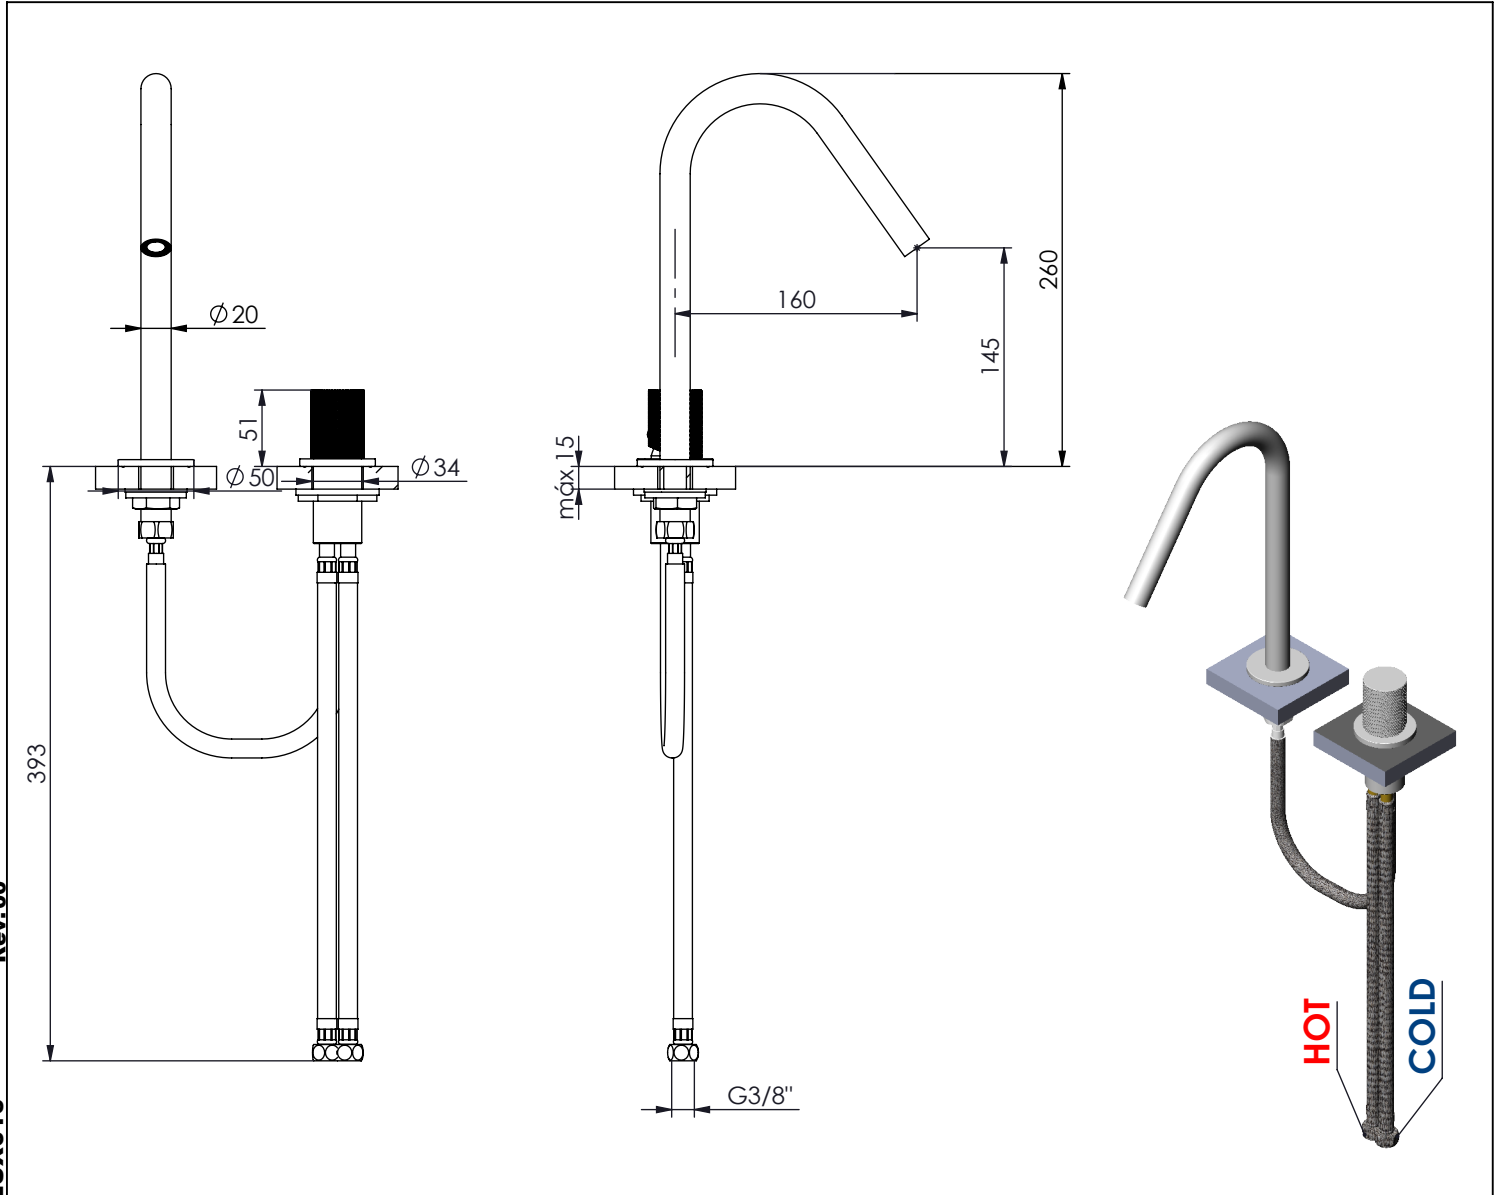

LUX016 Rev.00




CARACTERÍSTICAS TÉCNICAS

PRESSÃO RECOMENDADA: RECOMMENDED PRESSURE:	3 - 4 BAR
TEMPERATURA RECOMENDADA: RECOMMENDED TEMPERATURE:	15°C - 65°C
MATERIAIS: MATERIALS:	Latão
TEMPERATURA MÁXIMA: MAXIMUM TEMPERATURE:	70°C
CAUDAL MÁXIMO A 3 BAR: MAXIMUM FLOW AT 3 BAR:	5L/MIN
LIGAÇÃO DE ENTRADA: INPUT CONNECTION:	G3/8"
LIGAÇÃO DE SAÍDA: OUTPUT CONNECTION:	G1/2"
PESO (KG): WEIGHT (KG):	1,28
DIMENSÕES EMBALAGEM (MM): SIZE PACKAGING (MM):	367x205x80


ACABAMENTOS

CR - CROMADO CHROME CHROME CROMO
PR - PRETO MATE BLACK MATT NOIR MAT NEGRO MATE
BR - BRANCO MATE WHITE MATT BLANC MAT BLANCO MATE
ST - SATINOX SATINOX SATINOX SATINOX
AT - ANTRACITE ANTHRACITE ANTHRACITE ANTRACITA
GM - GUNMETAL GUNMETAL GUNMETAL GUNMETAL
GMM - GUNMETAL MATE GUNMETAL MATT GUNMETAL MAT GUNMETAL MATE
OR - DOURADO GOLD DORÉ DORADO
ORM - DOURADO MATE GOLD MATT DORÉ MAT DORADO MATE
CB - COBRE COPPER CUIVRE COBRE
CBM - COBRE MAT COPPER MAT CUIVRE MAT COBRE MATE

TECNOLOGIA

-  Perlator Embutido
Built-in Aerator
-  AC550 - Cartucho Ø25
AC550 - Cartridge Ø25
-  Embutido ao balcão
Built-in to balcony

! SERVICE

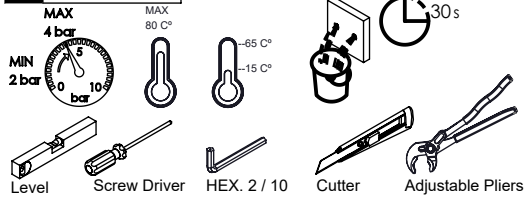


ASM TAPS®


WATER SOUL

INSTALLATION MANUAL


1 CONECTION

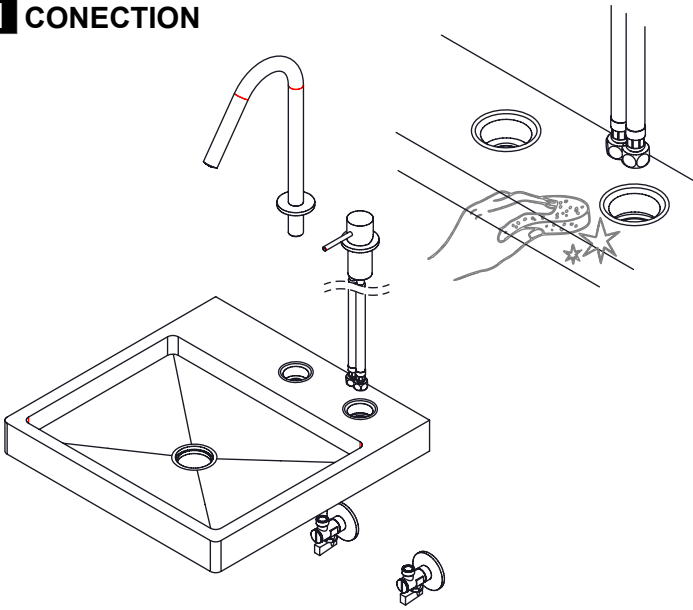


2 FIXED

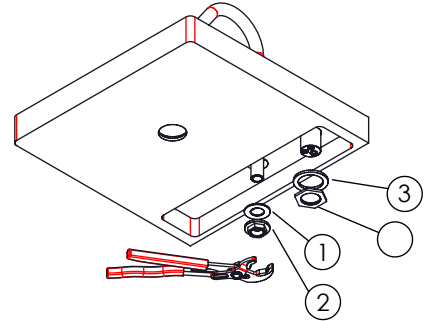

3 FIX IT

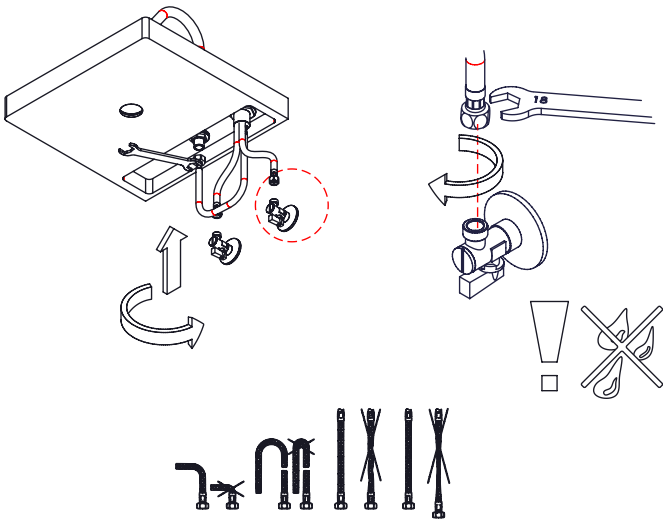

4 MAINTENANCE

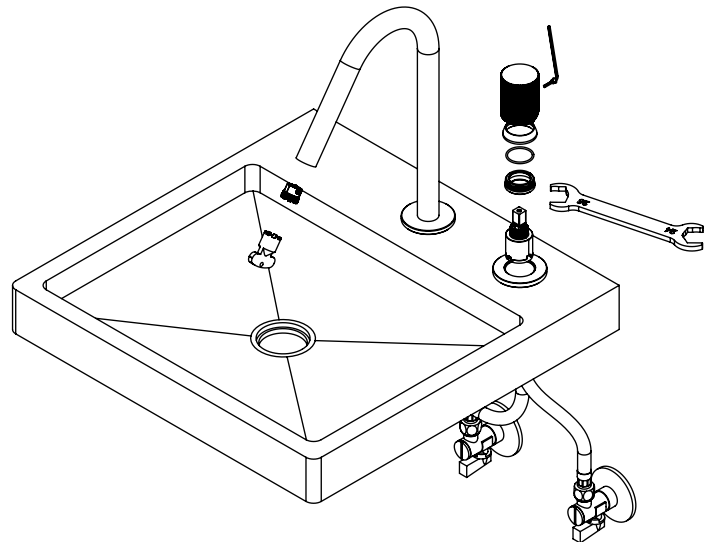

5

6