

# SPIRAL080

## MONOCOMANDO EMBUTIR BANHO/DUCHE 2 VIAS SPIRAL








ASM TAPS®

WATER SOUL

**EN** CONCEALED 2 WAY BATH/SHOWER MIXER SPIRAL

**FR** MITIGEUR BAIGNOIRE/DOUCHE ENCASTRÉ 2 VOIES SPIRAL

**ES** MONOMANDO BAÑO/DUCHA EMPOTRAR 2 VIAS SPIRAL

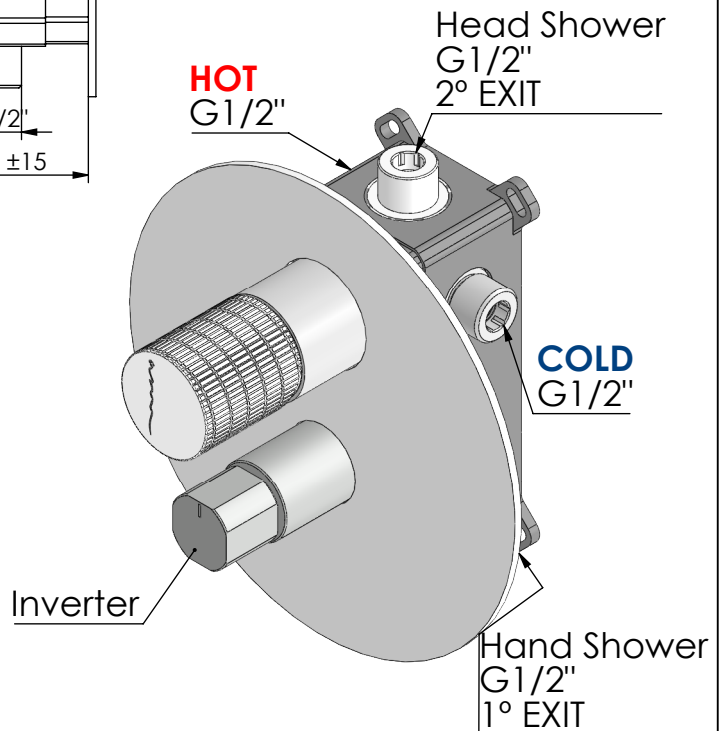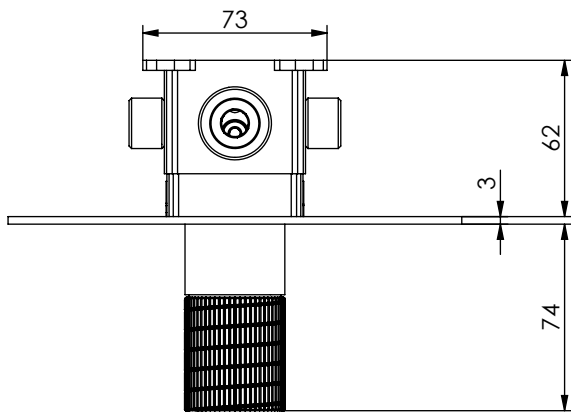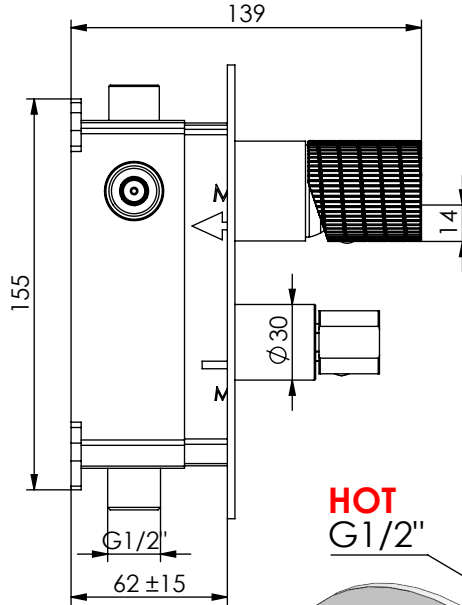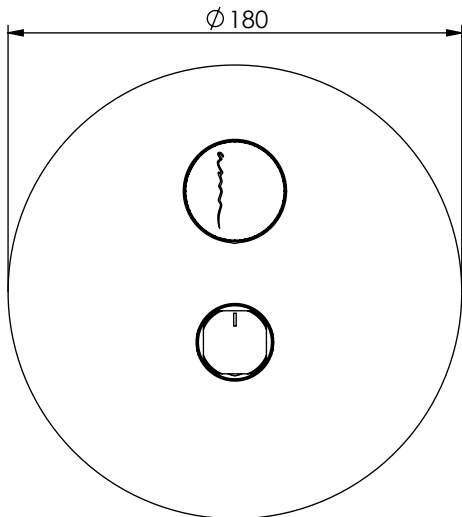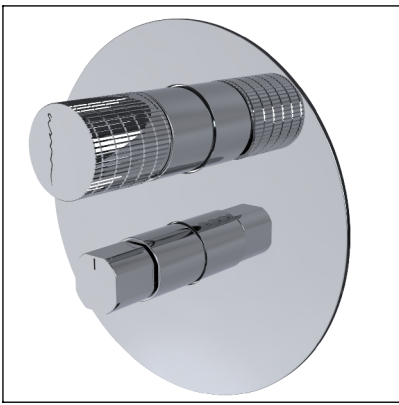

Rev.00

SPIRAL080

### CARACTERÍSTICAS TÉCNICAS

PRESSÃO RECOMENDADA: RECOMMENDED PRESSURE:	3 - 4 BAR
TEMPERATURA RECOMENDADA: RECOMMENDED TEMPERATURE:	15°C - 65°C
MATERIAIS: MATERIALS:	Latão
TEMPERATURA MÁXIMA: MAXIMUM TEMPERATURE:	70°C
CAUDAL MÁXIMO A 3 BAR: MAXIMUM FLOW AT 3 BAR:	L/MIN
LIGAÇÃO DE ENTRADA: INPUT CONNECTION:	G1/2"
LIGAÇÃO DE SAÍDA: OUTPUT CONNECTION:	G1/2"
PESO (KG): WEIGHT (KG):	2,3
DIMENSÕES EMBALAGEM (MM): SIZE PACKAGING (MM):	270x235x80


### ACABAMENTOS

CR - CROMADO   CHROME   CHROME   CROMO
PR - PRETO MATE   BLACK MATT   NOIR MAT   NEGRO MATE
BR - BRANCO MATE   WHITE MATT   BLANC MAT   BLANCO MATE
ST - SATINOX   SATINOX   SATINOX   SATINOX
AT - ANTRACITE   ANTHRACITE   ANTHRACITE   ANTRACITA
GM - GUNMETAL   GUNMETAL   GUNMETAL   GUNMETAL
GMM - GUNMETAL MATE   GUNMETAL MATT   GUNMETAL MAT   GUNMETAL MATE
OR - DOURADO   GOLD   DORÉ   DORADO
ORM - DOURADO MATE   GOLD MATT   DORÉ MAT   DORADO MATE
CB - COBRE   COPPER   CUIVRE   COBRE
CBM - COBRE MAT   COPPER MAT   CUIVRE MAT   COBRE MATE

### TECNOLOGIA

- AC540C - Cartucho Ø35 Energy Saving  
AC540C - Ø35 Energy Saving Cartridge
- AC1840 - Distribuidor 2 vias Ø25  
AC1840 - 2 way distributor Ø25
- Embutido a parede  
Built-in to wall
- Abertura energia saving  
Opening energy saving

# ! SERVICE

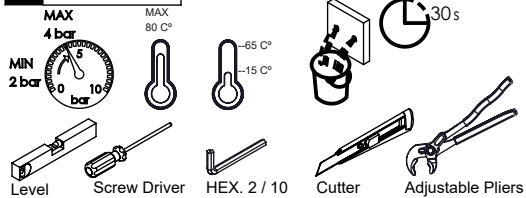

# SPIRAL080

MONOCOMANDO EMBUTIR  
BANHO/DUCHE 2 VIAS SPIRAL




A S M T A P S ®


W A T E R S O U L

## INSTALLATION MANUAL


### 1 CONECTION

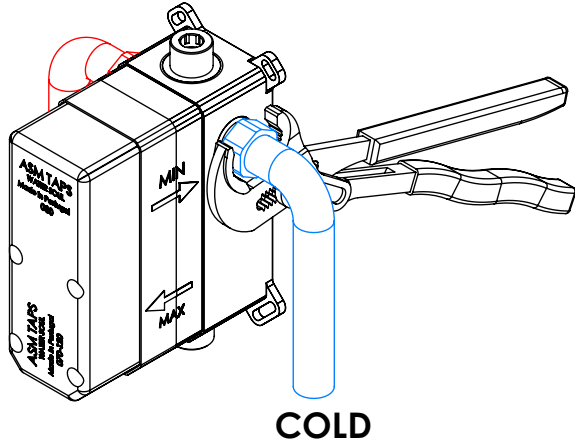


### 2 FIXED

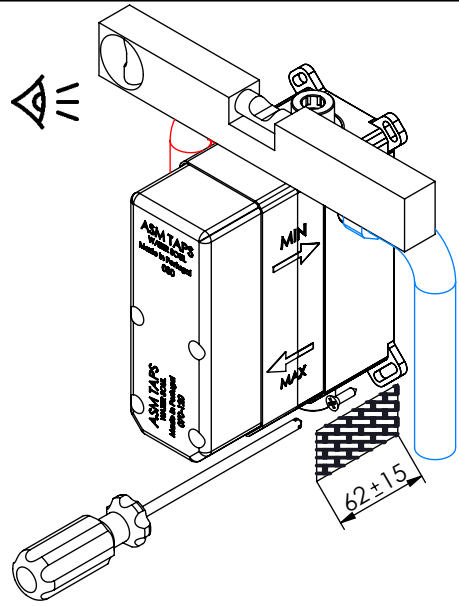


### 3 REMOVE PROTECTION

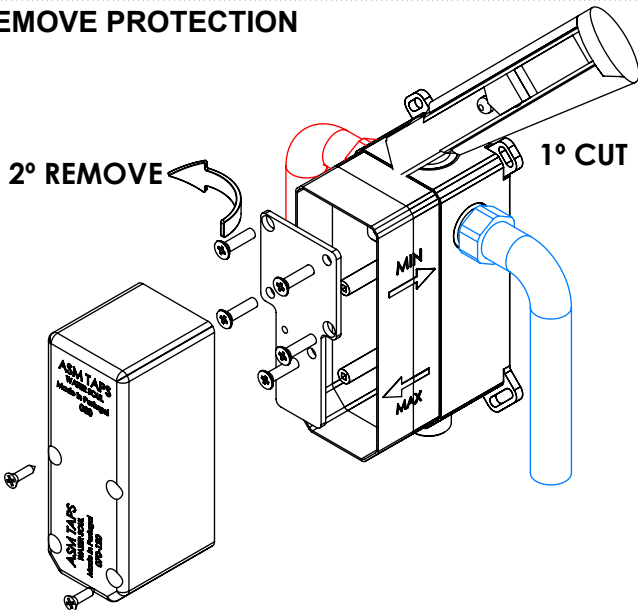

### 4 FIX IT

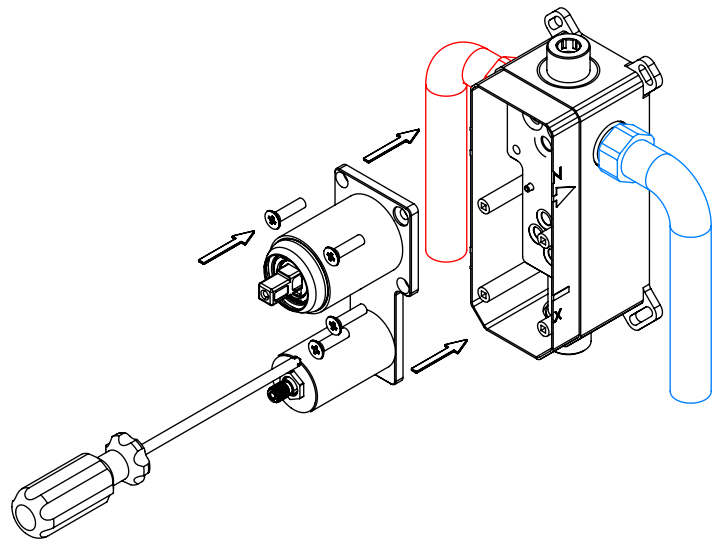

### 5 FIX IT

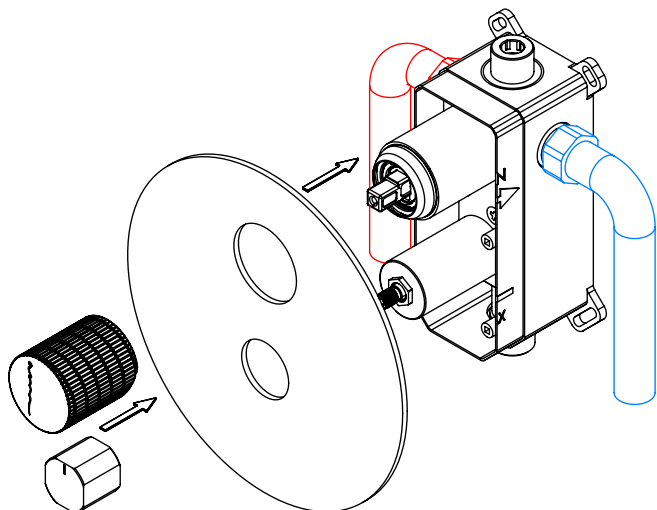

### 6 MAINTENANCE

