

SPIRAL090C1

MONOCOMANDO EMBUTIR 2/3 VIAS C/
CHUVEIRO MÃO SPIRAL






A S M T A P S[®]

WATER SOUL

EN CONCEALED 2/3 WAY MIXER WITH SET
HAND SHOWER SPIRAL

FR MITIGEUR ENCASTRÉE 2/3 VOIES KIT
DOUCHETTE À MAIN SPIRAL

ES MONOMANDO EMPOTRAR 2/3 VIAS SET DE
DUCHA MANO SPIRAL

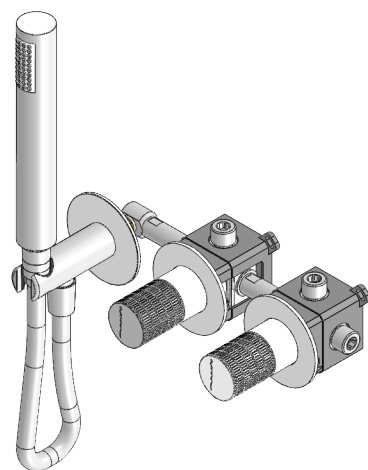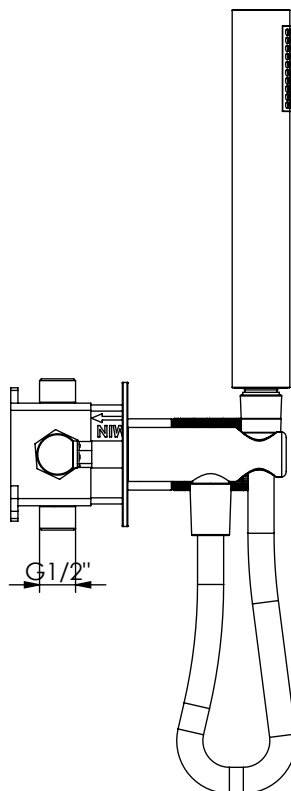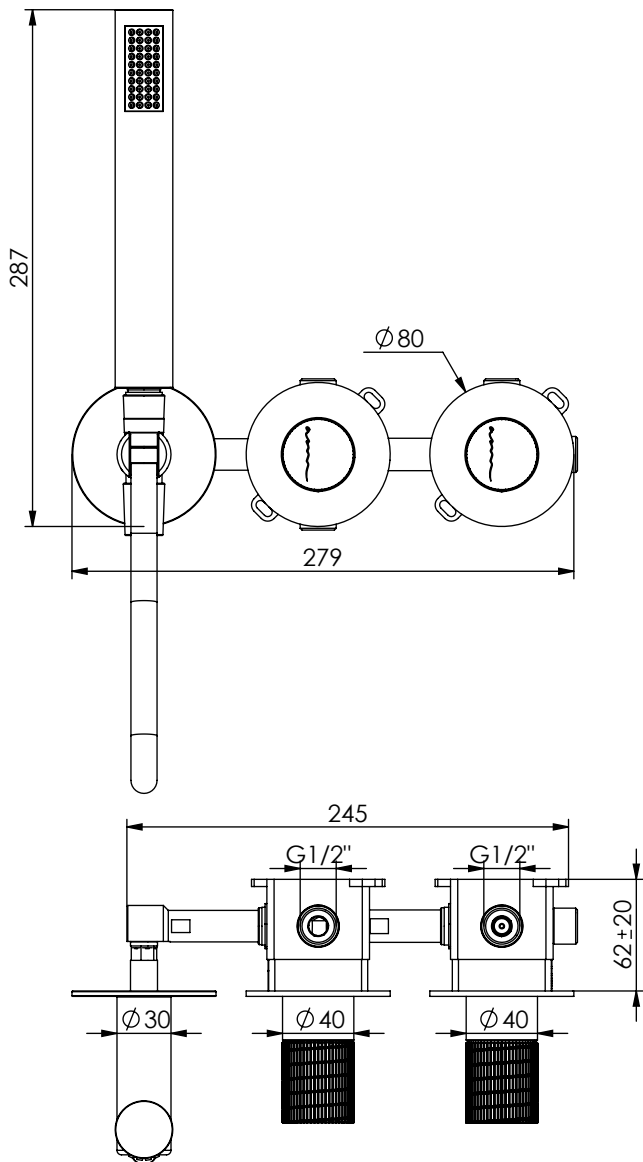

SPIRAL090C1 Rev.00

CARACTERÍSTICAS TÉCNICAS

PRESSÃO RECOMENDADA: RECOMMENDED PRESSURE:	3 - 4 BAR
TEMPERATURA RECOMENDADA: RECOMMENDED TEMPERATURE:	15°C - 65°C
MATERIAIS: MATERIALS:	Latão
TEMPERATURA MÁXIMA: MAXIMUM TEMPERATURE:	70°C
CAUDAL MÁXIMO A 3 BAR: MAXIMUM FLOW AT 3 BAR:	L/MIN
LIGAÇÃO DE ENTRADA: INPUT CONNECTION:	G1/2"
LIGAÇÃO DE SÉIDA: OUTPUT CONNECTION:	G1/2"
PESO (KG): WEIGHT (KG):	3,38
DIMENSÕES EMBALAGEM (MM): SIZE PACKAGING (MM):	285x200x170


ACABAMENTOS

CR - CROMADO CHROME CHROME CROMO
PR - PRETO MATE BLACK MATT NOIR MAT NEGRO MATE
BR - BRANCO MATE WHITE MATT BLANC MAT BLANCO MATE
ST - SATINOX SATINOX SATINOX SATINOX
AT - ANTRACITE ANTHRACITE ANTHRACITE ANTRACITA
GM - GUNMETAL GUNMETAL GUNMETAL GUNMETAL
GMM - GUNMETAL MATE GUNMETAL MATT GUNMETAL MAT GUNMETAL MATE
OR - DOURADO GOLD DORÉ DORADO
ORM - DOURADO MATE GOLD MATT DORÉ MAT DORADO MATE
CB - COBRE COPPER CUIVRE COBRE
CBM - COBRE MAT COPPER MAT CUIVRE MAT COBRE MATE

TECNOLOGIA

-  AC560 - DISTRIBUIDOR 3/4 VIAS
AC560 - 3/4 WAY DISTRIBUTOR
-  AC540C - Cartucho Ø35 Energy Saving
AC540C - Ø35 Energy Saving Cartridge
-  Abertura energia saving
Opening energy saving
-  Chuveiro de mão cilíndrico
Cylindrical hand shower
-  Ligação banheira/duche 1,70mt cromolux
Bath/shower connection 1.70 mt cromolux
-  Embutido a parede
Built-in to wall

! SERVICE

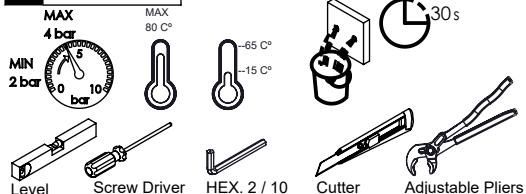

SPIRAL090C1

MONOCOMANDO EMBUTIR 2/3 VIAS
C/ CHUVEIRO MÃO SPIRAL




A S M T A P S ®


W A T E R S O U L

INSTALLATION MANUAL


1 CONECTION

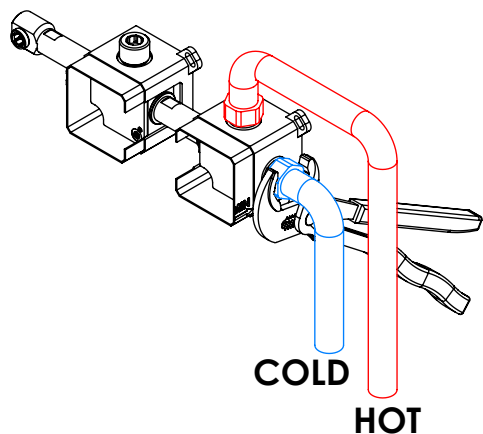


2 FIXED

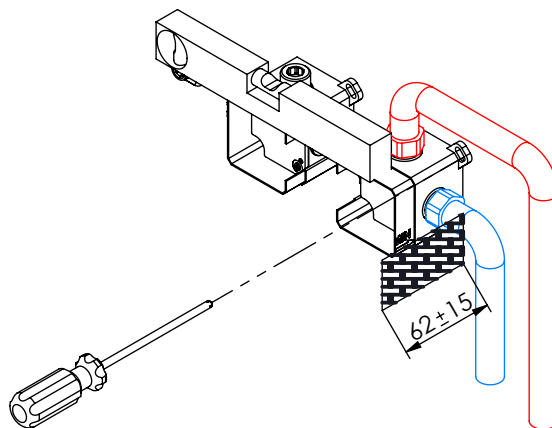


3 REMOVE PROTECTION

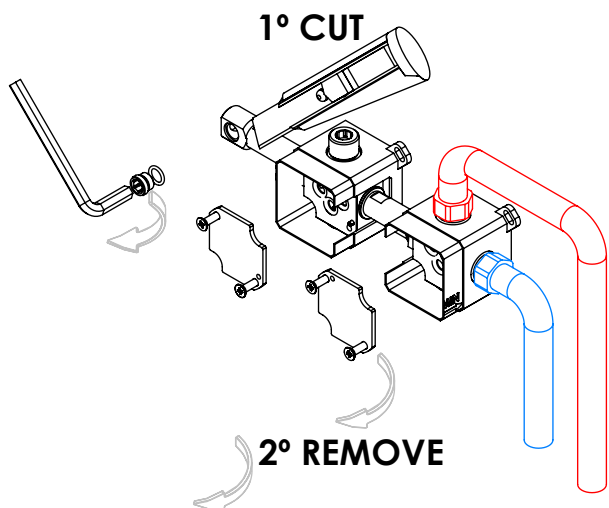

4 FIX IT

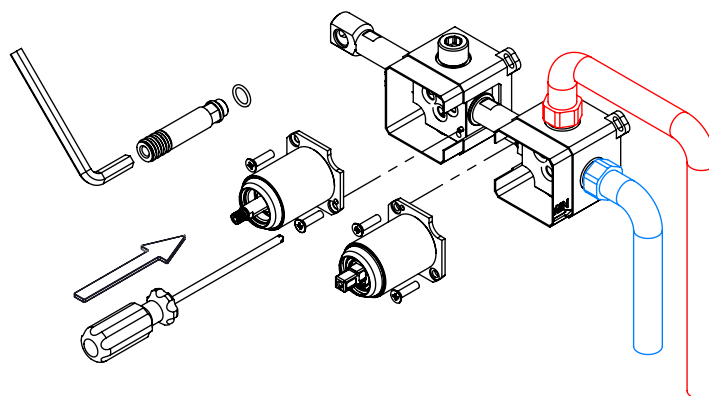

5 FIX IT

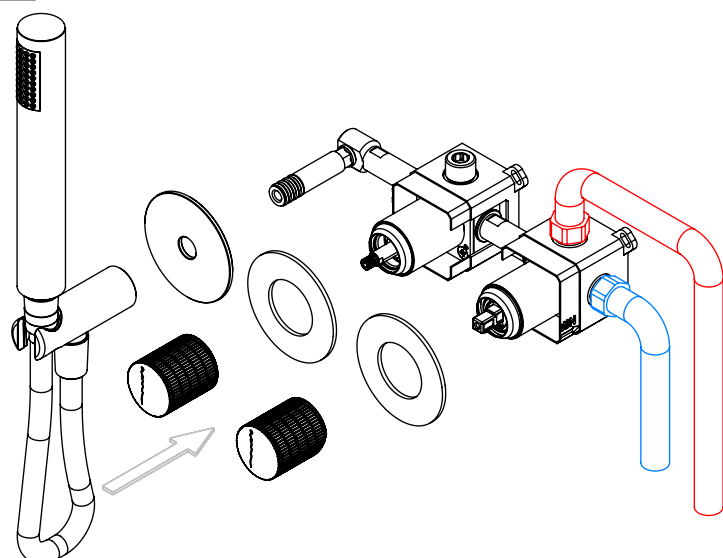

6 MAINTENANCE

