

SPIRAL100

MONOCOMANDO LAVATÓRIO
PAREDE/BANCADA SPIRAL








A S M T A P S[®]

W A T E R S O U L

EN WALL/DECK-MOUNTED CONCEALED
WASHBASIN MIXER SPIRAL

FR MITIGEUR LAVABO ENCASTRÉE DE
MUR/PLAN SPIRAL

ES MONOMANDO LAVABO EMPOTRAR DE
PARED/ ENCIMERA SPIRAL

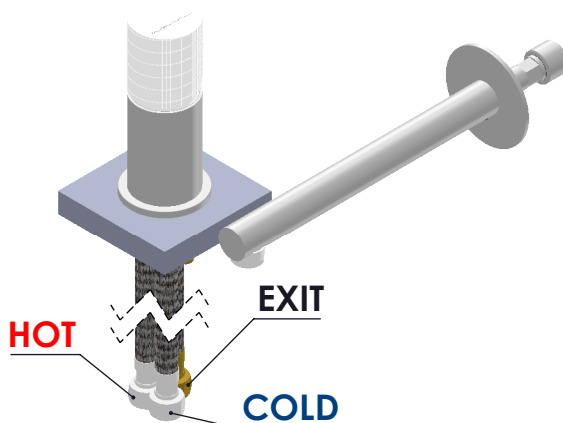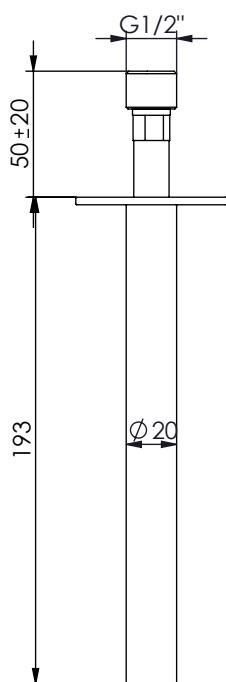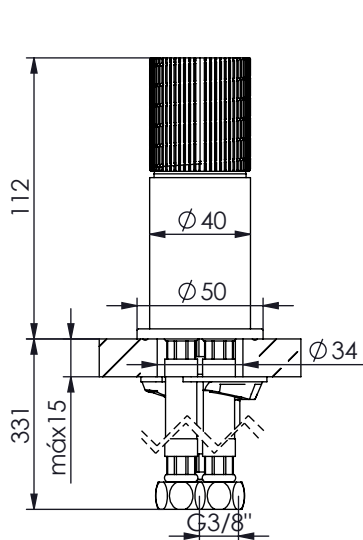

Rev.00

SPIRAL100

CARACTERÍSTICAS TÉCNICAS

PRESSÃO RECOMENDADA:
RECOMMENDED PRESSURE: 3 - 4 BAR

TEMPERATURA RECOMENDADA:
RECOMMENDED TEMPERATURE: 15°C - 65°C

MATERIAIS:
MATERIALS: Latão

TEMPERATURA MÁXIMA:
MAXIMUM TEMPERATURE: 70°C

CAUDAL MÁXIMO A 3 BAR:
MAXIMUM FLOW AT 3 BAR: 5L/MIN

LIGAÇÃO DE ENTRADA:
INPUT CONNECTION: G3/8"

LIGAÇÃO DE SAÍDA:
OUTPUT CONNECTION: G1/2"

PESO (KG):
WEIGHT (KG): 1,5

DIMENSÕES EMBALAGEM (MM):
SIZE PACKAGING (MM): 274x162x102

ACABAMENTOS

CR - CROMADO | CHROME | CHROME | CROMO

PR - PRETO MATE | BLACK MATT | NOIR MAT | NEGRO MATE

BR - BRANCO MATE | WHITE MATT | BLANC MAT | BLANCO MATE

ST - SATINOX | SATINOX | SATINOX | SATINOX

AT - ANTRACITE | ANTHRACITE | ANTHRACITE | ANTRACITA

GM - GUNMETAL | GUNMETAL | GUNMETAL | GUNMETAL

GMM - GUNMETAL MATE | GUNMETAL MATT | GUNMETAL MAT | GUNMETAL MATE





OR - DOURADO | GOLD | DORÉ | DORADO

ORM - DOURADO MATE | GOLD MATT | DORÉ MAT | DORADO MATE


CB - COBRE | COPPER | CUIVRE | COBRE

CBM - COBRE MAT | COPPER MAT | CUIVRE MAT | COBRE MATE

TECNOLOGIA

-  AC540C - Cartucho Ø35 Energy Saving
AC540C - Ø35 Energy Saving Cartridge
-  Embutido a parede
Built-in to wall
-  Embutido ao balcão
Built-in to balcony
-  Abertura energia saving
Opening energy saving

! SERVICE

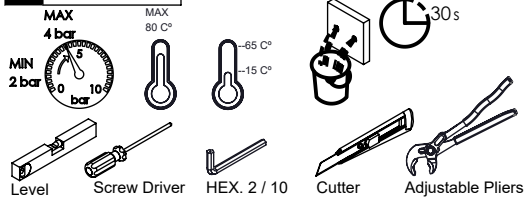

SPIRAL100

MONOCOMANDO LAVATÓRIO PAREDE/BANCADA SPIRAL




A S M T A P S ®


W A T E R S O U L

INSTALLATION MANUAL


1 INSTALLATION

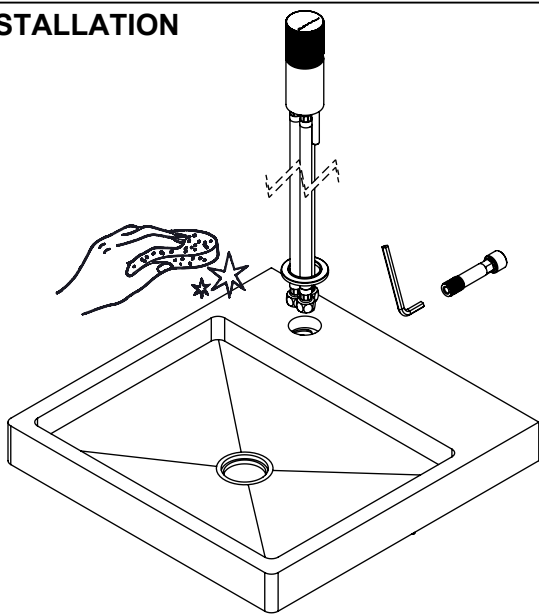


2 FIXED

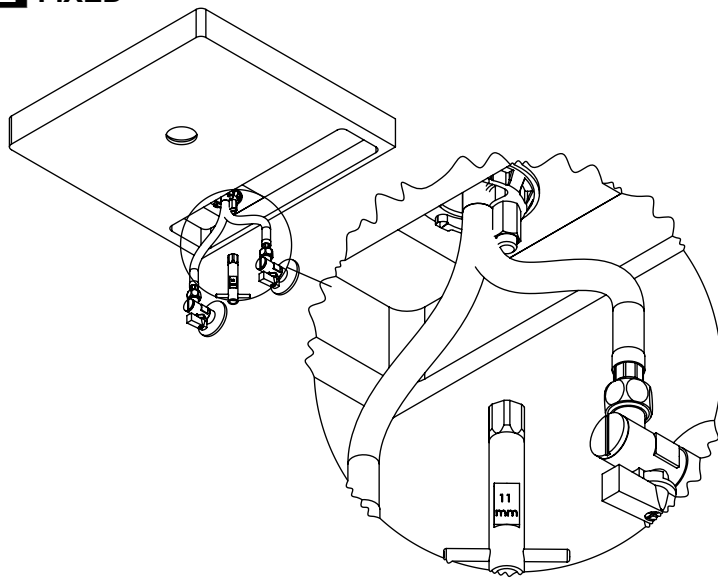


3 CONNECTION

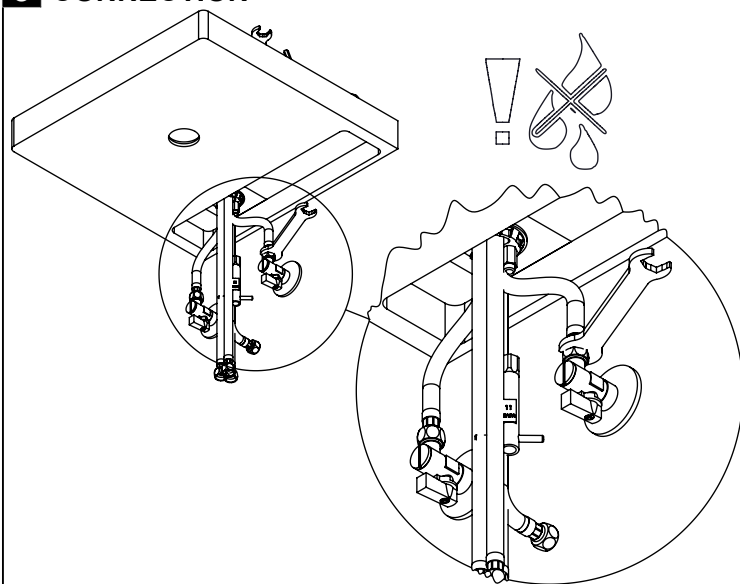

4 FIX IT

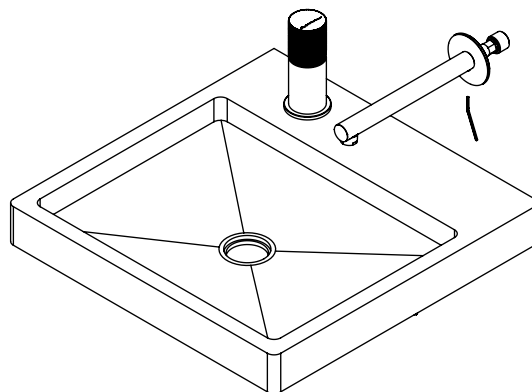

5 MAINTENANCE

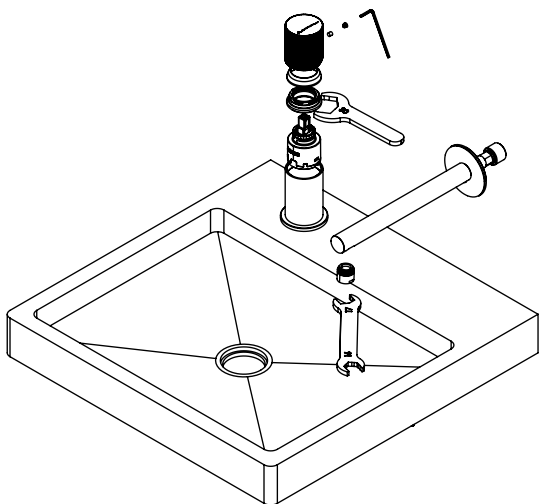

6