

Foto Obsoleta

TERQ080B2

MISTURADORA EMBUTIR TERMOSTÁTICA
CLIC 2 VIAS QUADRA







ASM TAPS®

WATER SOUL

EN CONCEALED CLIC 2 WAY THERMOSTATIC
MIXER QUADRA

FR MÉLANGEUR 2 VOIES CLIC
THERMOSTATIQUE QUADRA

ES MÉLANGEUR 2 VOIES CLIC
THERMOSTATIQUE QUADRA

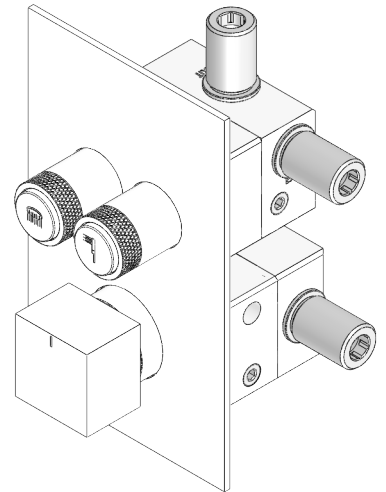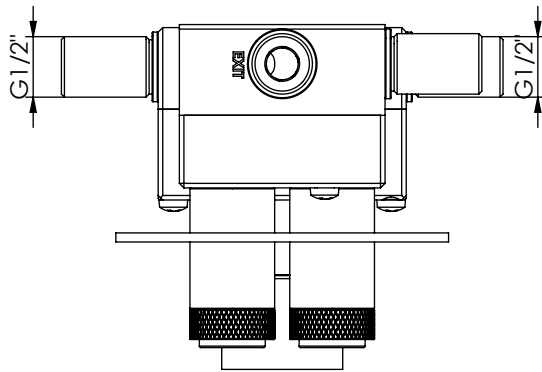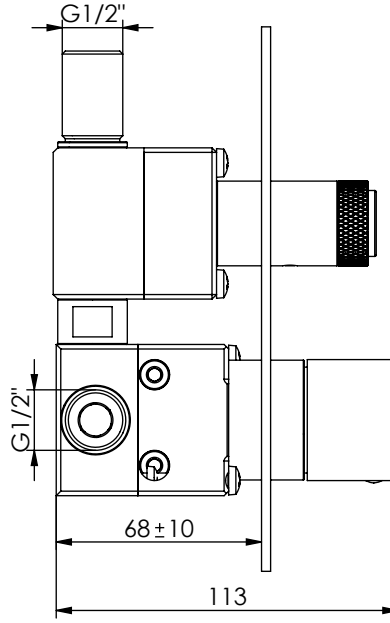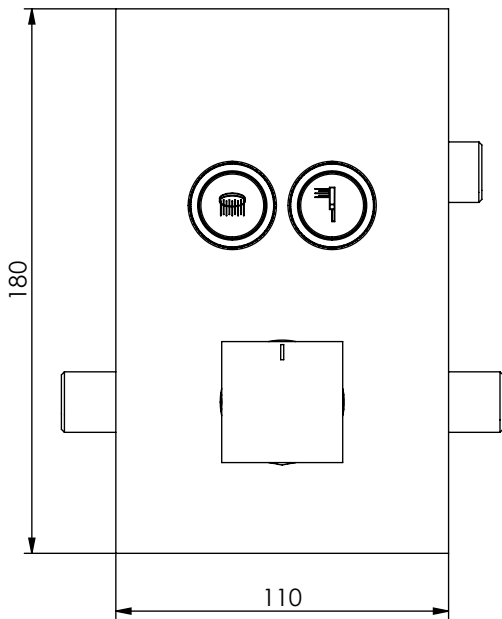

Rev.00

TERQ080B2

CARACTERÍSTICAS TÉCNICAS

| | |
|--|-------------|
| PRESSÃO RECOMENDADA: RECOMMENDED PRESSURE: | 3 - 4 BAR |
| TEMPERATURA RECOMENDADA: RECOMMENDED TEMPERATURE: | 15°C - 65°C |
| MATERIAIS: MATERIALS: | Latão |
| TEMPERATURA MÁXIMA: MAXIMUM TEMPERATURE: | 70°C |
| CAUDAL MÁXIMO A 3 BAR: MAXIMUM FLOW AT 3 BAR: | L/MIN |
| LIGAÇÃO DE ENTRADA: INPUT CONNECTION: | G1/2" |
| LIGAÇÃO DE SÉIDA: OUTPUT CONNECTION: | G1/2" |
| PESO (KG): WEIGHT (KG): | 3,56 |
| DIMENSÕES EMBALAGEM (MM): SIZE PACKAGING (MM): | 285x200x170 |


ACABAMENTOS

| |
|--|
| CR - CROMADO CHROME CHROME CROMO |
| PR - PRETO MATE BLACK MATT NOIR MAT NEGRO MATE |
| BR - BRANCO MATE WHITE MATT BLANC MAT BLANCO MATE |
| ST - SATINOX SATINOX SATINOX SATINOX |
| AT - ANTRACITE ANTHRACITE ANTHRACITE ANTRACITA |
| GM - GUNMETAL GUNMETAL GUNMETAL GUNMETAL |
| GMM - GUNMETAL MATE GUNMETAL MATT GUNMETAL MAT GUNMETAL MATE |
| OR - DOURADO GOLD DORÉ DORADO |
| ORM - DOURADO MATE GOLD MATT DORÉ MAT DORADO MATE |
| CB - COBRE COPPER CUIVRE COBRE |
| CBM - COBRE MAT COPPER MAT CUIVRE MAT COBRE MATE |

TECNOLOGIA

- AC2140 - Válvula on/off FSG D6 control volume
AC2140 - FSG D6 on/off clic valve
- AC1940 - Cartucho termostático Mini Kerox
AC1940 - Mini Thermostatic Cartridge Kerox
- Embutido a parede
Built-in to wall
- Termostática
Thermostatic

! SERVICE

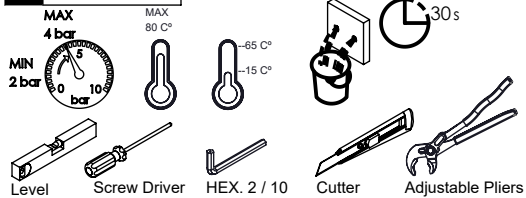

TERQ080B2

MISTURADORA EMBUTIR TERMOSTÁTICA CLIC 2 VIAS QUADRA




A S M T A P S ®


W A T E R S O U L

INSTALLATION MANUAL


1 CONECTION

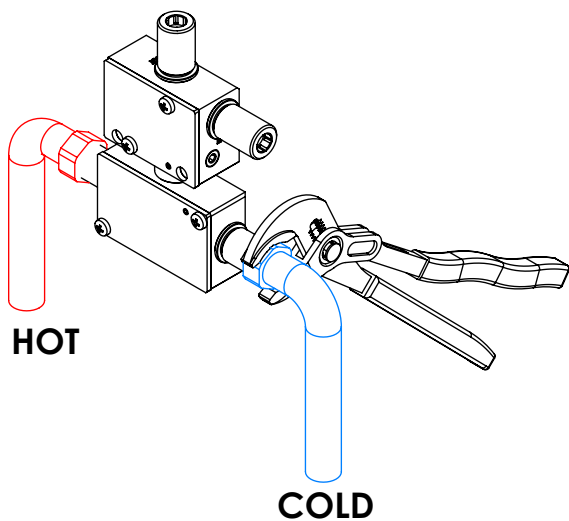


2 FIXED

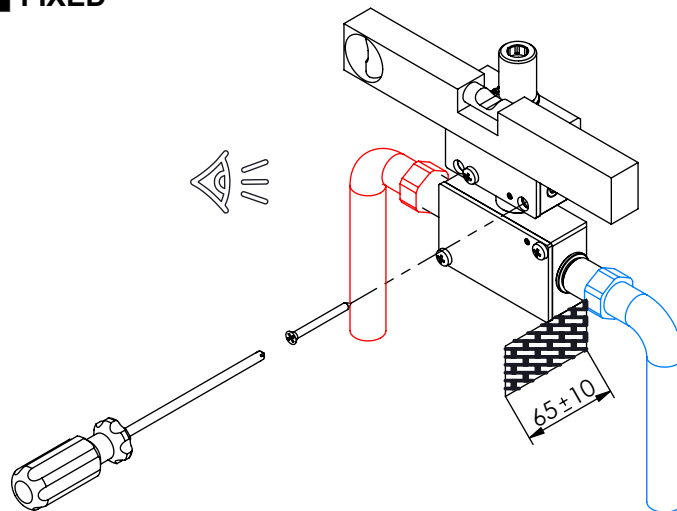


3 REMOVE PROTECTION

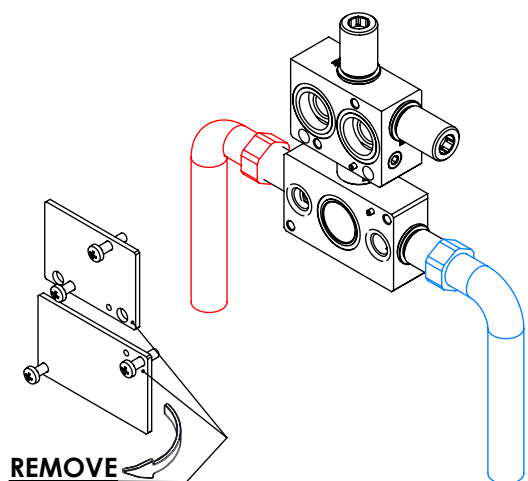

4 FIX IT

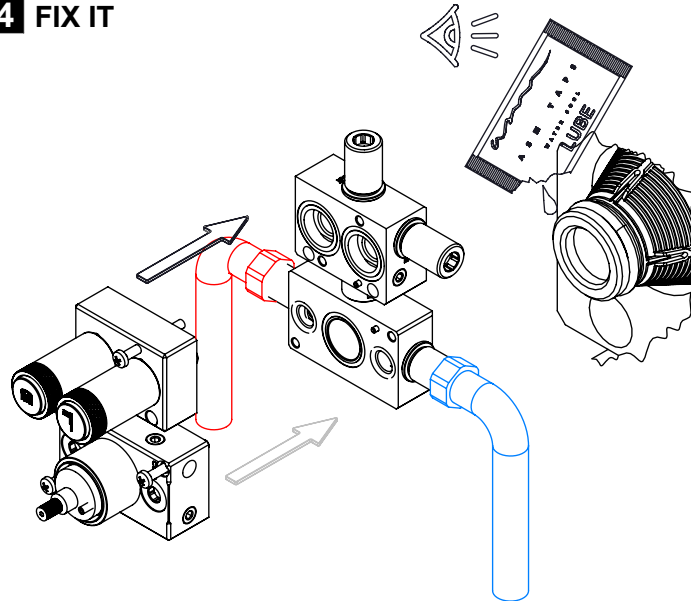

5 FIX IT

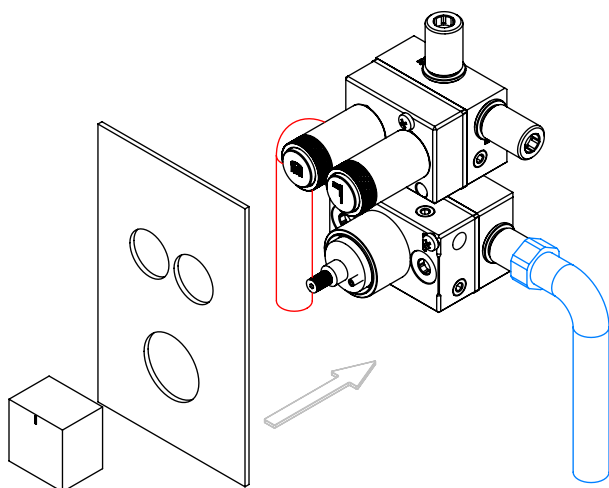

6 MAINTENANCE

