

Foto Obsoleta

TERQ090B3

MISTURADORA EMBUTIR TERMOSTÁTICA
CLIC 3 VIAS QUADRA




ASM TAPS®

WATER SOUL

EN CONCEALED CLIC 3 WAY THERMOSTATIC
MIXER QUADRA

FR MÉLANGEUR ENCASTRÉ CLIC 3 VOIES
THERMOSTATIQUE QUADRA

ES MEZCLADOR EMPOTRAR CLIC 3 VIAS
TERMOSTÁTICO QUADRA

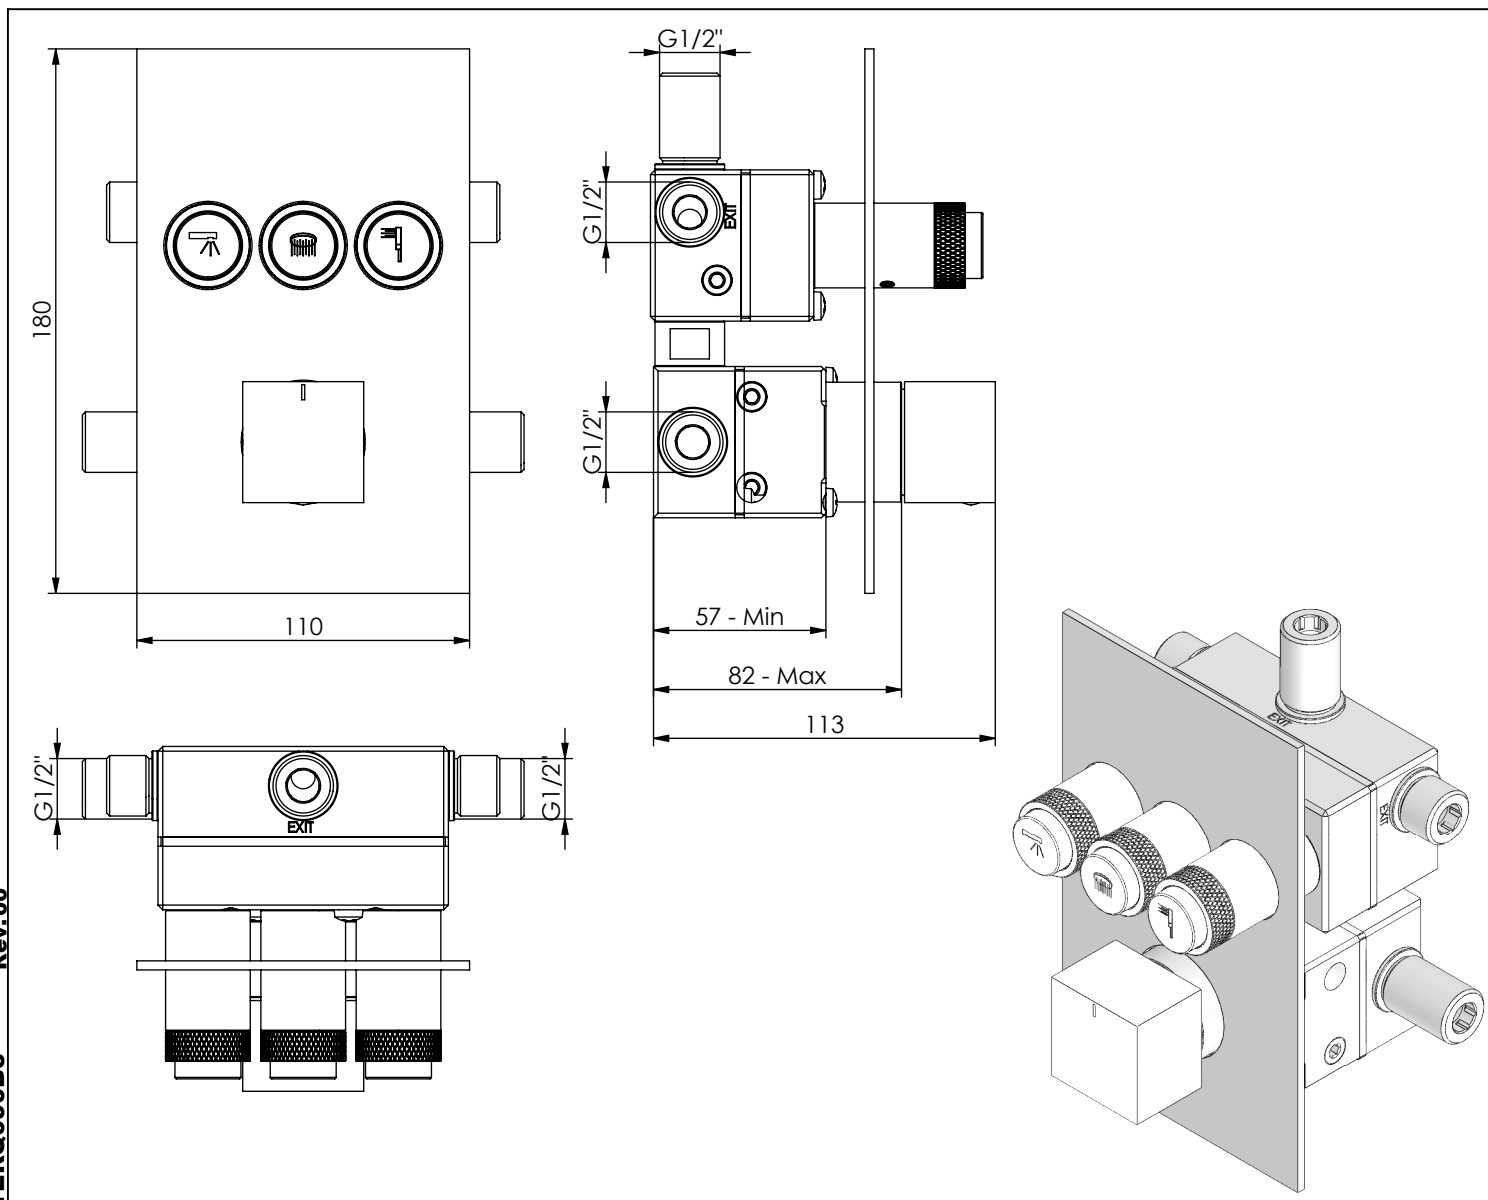

Rev.00
TERQ090B3

CARACTERÍSTICAS TÉCNICAS

PRESSÃO RECOMENDADA:
RECOMMENDED PRESSURE: 3 - 4 BAR

TEMPERATURA RECOMENDADA:
RECOMMENDED TEMPERATURE: 15°C - 65°C

MATERIAIS:
MATERIALS: Latão

TEMPERATURA MÁXIMA:
MAXIMUM TEMPERATURE: 70°C

CAUDAL MÁXIMO A 3 BAR:
MAXIMUM FLOW AT 3 BAR: L/MIN

LIGAÇÃO DE ENTRADA:
INPUT CONNECTION: G1/2"

LIGAÇÃO DE SÉIDA:
OUTPUT CONNECTION: G1/2"

PESO (KG):
WEIGHT (KG): 4,19

DIMENSÕES EMBALAGEM (MM):
SIZE PACKAGING (MM): 285x200x170

ACABAMENTOS

CR - CROMADO | CHROME | CHROME | CROMO

PR - PRETO MATE | BLACK MATT | NOIR MAT | NEGRO MATE

BR - BRANCO MATE | WHITE MATT | BLANC MAT | BLANCO MATE

ST - SATINOX | SATINOX | SATINOX | SATINOX

AT - ANTRACITE | ANTHRACITE | ANTHRACITE | ANTRACITA

GM - GUNMETAL | GUNMETAL | GUNMETAL | GUNMETAL

GMM - GUNMETAL MATE | GUNMETAL MATT | GUNMETAL MATT | GUNMETAL MATE

OR - DOURADO | GOLD | DORÉ | DORADO

ORM - DOURADO MATE | GOLD MATT | DORÉ MAT | DORADO MATE


CB - COBRE | COPPER | CUIVRE | COBRE

CBM - COBRE MAT | COPPER MAT | CUIVRE MAT | COBRE MATE

TECNOLOGIA

- AC2140 - Válvula on/off FSG D6 control volume
AC2140 - FSG D6 on/off clic valve
- AC1940 - Cartucho termostático Mini Kerox
AC1940 - Mini Thermostatic Cartridge Kerox
- Embutido a parede
Built-in to wall
- Termostática
Thermostatic

! SERVICE

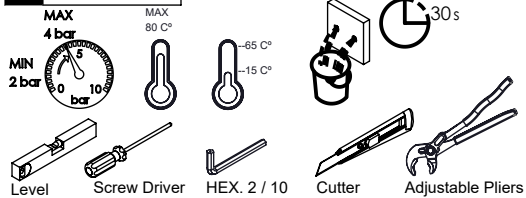

TERQ090B3

MISTURADORA EMBUTIR TERMOSTÁTICA CLIC 3 VIAS QUADRA




A S M T A P S ®


W A T E R S O U L

INSTALLATION MANUAL


1 CONECTION

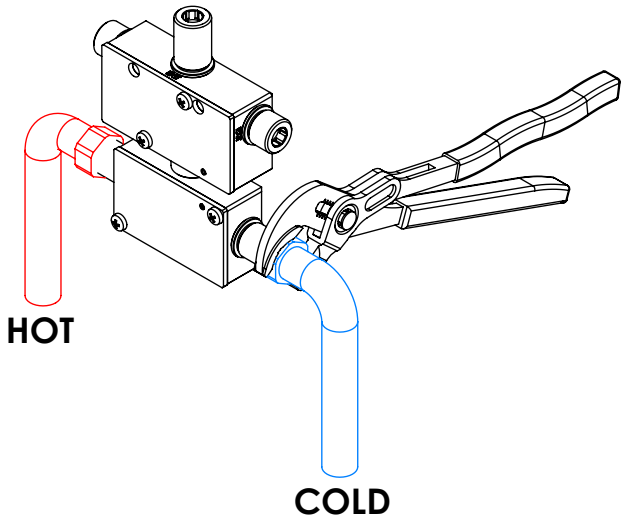


2 FIXED

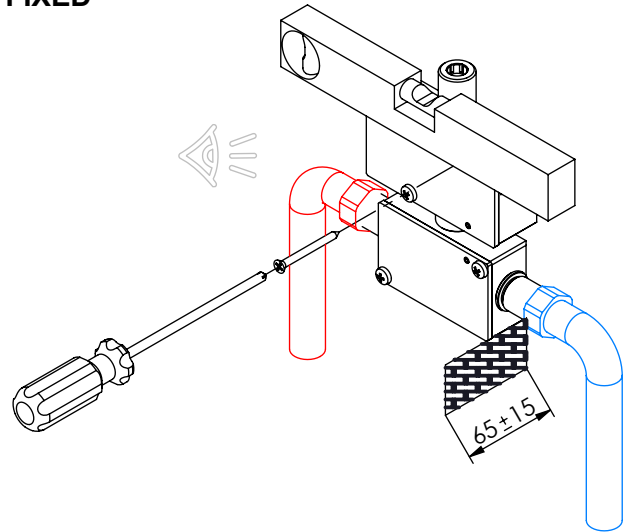


3 REMOVE PROTECTION

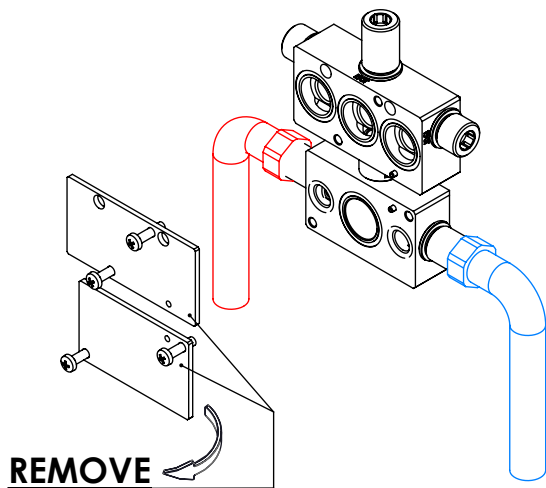

4 FIX IT

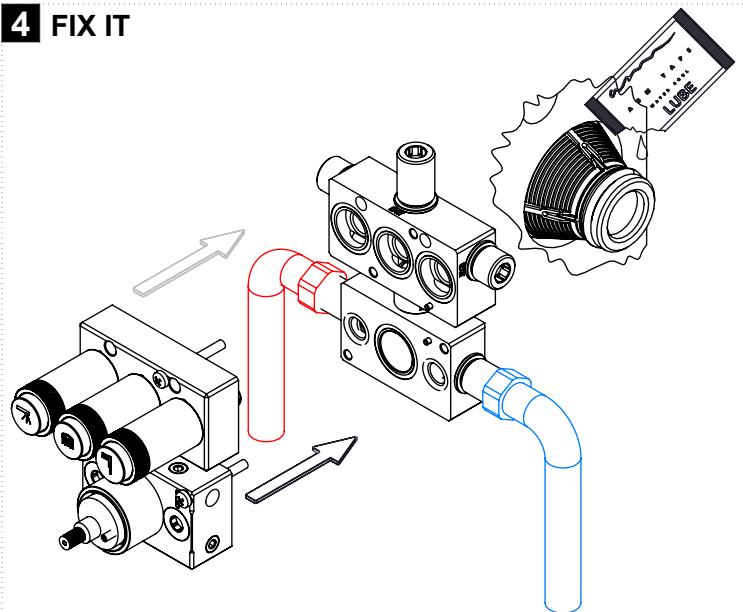

5 FIX IT

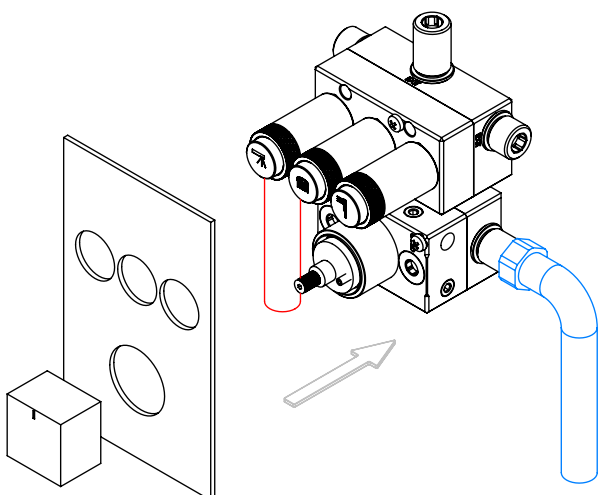

6 MAINTENANCE

